


Aligning Needle Roller Bearings

With Or Without Inner Ring

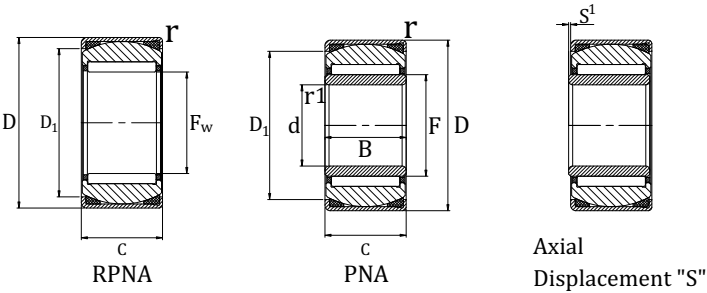

Designation	Mass	Dimensions					Basic Load Ratings	
	m	Fw	D	C ₁	D ₁	r	Dynamic	Static
	g			±0.5		min.	C _r N	C _{or} N
RPNA 15/28	32	15	28	12	24.5	0.8	7800	7900
RPNA 18/32	52	18	32	16	27.0	0.8	13900	18200
RPNA 20/35	62	20	35	16	30.5	0.8	14400	19600
RPNA 25/42	109	25	42	20	36.5	0.8	20500	33100
RPNA 28/44	112	28	44	20	38.5	0.8	21500	36750
RPNA 30/47	125	30	47	20	42.0	0.8	23600	37200
RPNA 35/52	131	35	52	20	47.5	0.8	26600	45200
RPNA 40/55	141	40	55	20	50.5	0.8	29100	53300
RPNA 45/62	176	45	62	20	58.0	0.8	29750	57500

Designation	Mass	Dimensions									Basic Load Ratings	
	m	d	F	D	C	B	D ₁	r	r ₁	S ¹⁾	Dynamic	Static
	g				±0.5			min.	min.	min.	C _r N	C _{or} N
PNA 15/28	37	12	15	28	12	12	24.5	0.8	0.3	0.5	7800	7900
PNA 18/32	62	15	18	32	16	16	27.0	0.8	0.3	0.5	13900	18200
PNA 20/35	73	17	20	35	16	16	30.5	0.8	0.3	0.5	14400	19600
PNA 25/42	136	20	25	42	20	20	36.5	0.8	0.3	0.5	20500	33100
PNA 28/44	145	22	28	44	20	20	38.5	0.8	0.3	0.5	21500	36750
PNA 30/47	157	25	30	47	20	20	42.0	0.8	0.3	0.5	23600	37200
PNA 35/52	181	30	35	52	20	20	47.5	0.8	0.3	0.5	26600	45200
PNA 40/55	177	35	40	55	20	20	50.5	0.8	0.3	0.5	29100	53300
PNA 45/62	227	40	45	62	20	20	58.0	0.8	0.3	0.5	29750	57500