


Yoke Type Track Rollers

With Axial Guidance

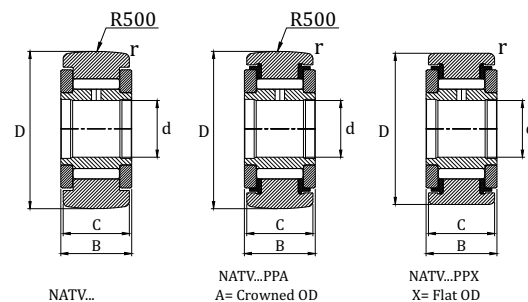

Designation	Dimensions					Basic Load Ratings	
	d	D	B	C	r	Dynamic C_r	Static C_{or}
					min.		
NATV 5	5	16	12	11	0.5	6800	8400
NATV 6	6	19	12	11	0.5	8100	11650
NATV 8	8	24	15	14	0.5	11850	15800
NATV 10	10	30	15	14	1.0	15700	18200
NATV 12	12	32	15	14	1.0	16700	20400
NATV 15	15	35	19	18	1.0	21000	35200
NATV 17	17	40	21	20	1.5	31900	46200
NATV 20	20	47	25	24	1.5	41650	67400
NATV 25	25	52	25	24	1.5	45450	79000
NATV 30	30	62	29	28	1.5	59950	110100
NATV 35	35	72	29	28	2.0	63050	121500
NATV 40	40	80	32	30	2.0	76350	164200
NATV 45	45	85	32	30	2.0	80350	181150
NATV 50	50	90	32	30	2.0	84250	197800