


Yoke Type Track Rollers With Axial Guidance

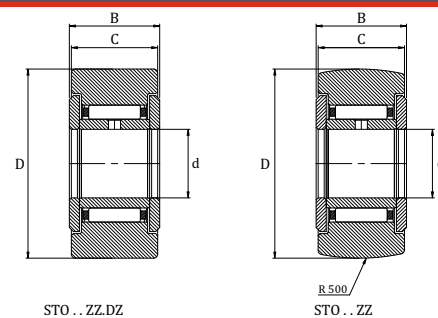

Designation	Mass	Designation	Dimensions					Basic Load Ratings	
								Dynamic	Static
Cylindrical Outer Race	m g	Crowned Outer Race	d	D	C	B	r	C_r	C_{or}
							min.	N	N
STO6 ZZ DZ	24.5	STO6 ZZ	6	19	13.8	14	0.3	3750	4750
STO8 ZZ DZ	39	STO8 ZZ	8	24	13.8	14	0.3	4200	5400
STO10 ZZ DZ	65	STO10 ZZ	10	30	15.8	16	0.3	8400	9200
STO12 ZZ DZ	75	STO12 ZZ	12	32	15.8	16	0.3	9000	10100
STO15 ZZ DZ	83	STO15 ZZ	15	35	15.8	16	0.3	9100	10700
STO17 ZZ DZ	135	STO17 ZZ	17	40	19.8	20	0.3	14200	17700
STO20 ZZ DZ	195	STO20 ZZ	20	47	19.8	20	0.3	16200	21500
STO25 ZZ DZ	225	STO25 ZZ	25	52	19.8	20	0.3	16400	22900
STO30 ZZ DZ	400	STO30 ZZ	30	62	24.8	25	0.6	23300	34500
STO35 ZZ DZ	550	STO35 ZZ	35	72	24.8	25	0.6	25500	40000
STO40 ZZ DZ	710	STO40 ZZ	40	80	25.8	26	1	23900	39000
STO45 ZZ DZ	760	STO45 ZZ	45	85	25.8	26	1	25500	43000
STO50 ZZ DZ	830	STO50 ZZ	50	90	25.8	26	1	26000	46000