


Cylindrical Roller Bearing

Double Row, With Seals

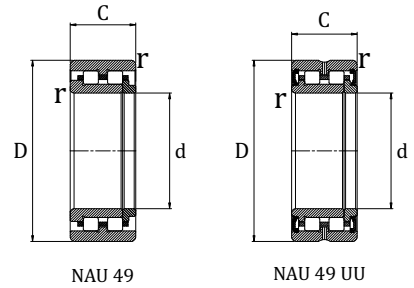

Designation	Dimensions				Basic Load Ratings	
	d	D	C	r	Dynamic	Static
					C_r	C_{or}
					N	N
NAU 4900 / NAU 4900 UU	10	22	13	0.3	6500	6400
NAU 4901 / NAU 4901 UU	12	24	13	0.3	7000	7150
NAU 4902 / NAU 4902 UU	15	28	13	0.3	8000	9150
NAU 4903 / NAU 4903 UU	17	30	13	0.3	8150	9560
NAU 4904 / NAU 4904 UU	20	37	17	0.3	10600	11200
NAU 4905 / NAU 4905 UU	25	42	17	0.3	11950	13950
NAU 4906 / NAU 4906 UU	30	47	17	0.3	15200	19850
NAU 4907 / NAU 4907 UU	35	55	20	0.6	19600	26400
NAU 4908 / NAU 4908 UU	40	62	22	0.6	23300	29300
NAU 4909 / NAU 4909 UU	45	68	22	0.6	24750	32750
NAU 4910 / NAU 4910 UU	50	72	22	0.6	26250	36250
NAU 4911 / NAU 4911 UU	55	80	25	1.0	33100	47100
NAU 4912 / NAU 4912 UU	60	85	25	1.0	34750	51450